


4-10-00

Attorney Docket No.: S1389/7008 GSE

04/07/00



J-685 U.S. PTO


UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i>	Attorney Docket No.	S1389/7008 GSE
	First Named Inventor or Application Identifier	
	SELIGER, Robert	
	Express Mail Label No.	EL583585403US
Date of Deposit		April 7, 2000

c-511 U.S. PTO

04/07/00

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	ADDRESS Box Patent Application TO: Assistant Commissioner for Patents Washington, DC 20231
1. <input type="checkbox"/> Fee Transmittal Form <i>(Submit an original, and a duplicate for fee processing)</i> 2. <input checked="" type="checkbox"/> Specification [Total pages 19] 15 - pages specification 1 - pages abstract 3 - pages claims 22 - Total claims 3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total sheets 2] <input checked="" type="checkbox"/> Informal <input type="checkbox"/> Formal [Total drawings 2] 4. <input type="checkbox"/> Oath or Declaration [Total pages --] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Unsigned c. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(g)) <i>(for continuation/divisional with Box 17 completed)</i> [Note Box 5 below] i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). 5. <input type="checkbox"/> Incorporation by Reference <i>(usable if Box 4b is checked)</i> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	6. <input type="checkbox"/> Microfiche Computer Program (Appendix) 7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies ACCOMPANYING APPLICATION PARTS 8. <input type="checkbox"/> Assignment Papers/cover sheet & documents(s) 9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <i>(when there is an assignee)</i> <input type="checkbox"/> Power of Attorney 10. <input type="checkbox"/> English Translation of Document <i>(if applicable)</i> 11. <input type="checkbox"/> Information Disclosure Statement PTO-1449 <input type="checkbox"/> Copies of IDS Citations 12. <input type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(Should be specifically itemized)</i> 14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired 15. <input type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i>
16. Other:	
17. If a CONTINUING APPLICATION , check appropriate box and supply the requisite information: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No.: <input type="checkbox"/> Cancel in this application original claims of the prior application before calculating the filing fee. <input type="checkbox"/> Amend the specification by inserting before the first line the sentence: This application is a <input type="checkbox"/> continuation <input type="checkbox"/> divisional of application serial no. , filed , entitled , and now .	

18. CORRESPONDENCE ADDRESS					
Correspondence address below					
ATTORNEY'S NAME	Gary S. Engelson, Reg. No. 35,128				
NAME	Wolf, Greenfield & Sacks, P.C.				
ADDRESS	600 Atlantic Avenue				
CITY	Boston	STATE	MA	ZIP	02210
COUNTRY	USA	TELEPHONE	(617) 720-3500	FAX	(617) 720-2441

19. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Gary S. Engelson, Reg. No. 35,128
SIGNATURE	
DATE	April 7, 2000

CONTEXT ADMINISTRATOR

Field of the Invention

The present invention relates to tools for managing and administering the
5 management of context in software applications.

Background of the Invention

There are many businesses or fields of endeavor, which rely on the use of plural
desktop computer applications. One such field is the modern practice of medicine. In
10 such a setting, users quite often find themselves entering and reentering similar
information over and over. For example, a single user may have to repeat login
information in plural applications, followed by the same or similar client information.
Such information, that defines the environment in which each application operates is
known as context. That is, context is a collection of data items and corresponding
15 values, wherein the items represent information required in common between plural
applications in an industry or business setting. For example, in health care, a patient
identifier (patient ID) is an item which is part of the context in which plural clinical
applications may participate, or share.

In the modern practice of medicine, a physician or other professional or staff
20 member may need to store, retrieve, analyze, etc. various types of patient data. The
patient data to be processed may be clinical; e.g. x-ray images or blood work results, or
may be financial, e.g. insurance cover and billing history. Thus, clinical applications,
such as those to store, retrieve and display x-ray images and those to store, retrieve and
display blood work results have inputs and outputs which fall into two broad classes:
25 highly specialized, work product specific I/O; and more general, context-related I/O.

The desirability of managing context information, so that a user at a workstation
need not reenter information such as user identification (user ID) or patient identification
(patient ID) has long been recognized.

A standard known as Health Level Seven Context Management Specification
30 Version CM-1.1 was promulgated by the Health Level Seven (HL7) Clinical Context
Object Workgroup (CCOW) on November 6, 1999, incorporated herein in its entirety by
reference, to define an interface and other architectural definitions of a Context

Management Architecture (CMA), whereby clinical applications interact with a Context Manager to manage context information across a range of clinical and other health care related applications.

At this time, there are no other known, comprehensive context management software packages available. Some small steps have been taken for example to share context amongst one publisher's own titles, using proprietary methods absent a context manager, or to permit a user to sign onto a single application which transfers user context to plural other applications. However, no context manager handling both user and patient context is known, much less a complete system with central administration of the context management process.

Summary of the Invention

What is desired is a context administrator and method which solves the problems associated with settings using plural, unrelated software applications to process data related to a common context.

As discussed above, context is a collection of data items and corresponding values, wherein the items represent information required in common between plural applications in an industry or business setting. For example, in health care, a patient identifier (patient ID) is an item which is part of the context in which plural clinical applications may participate, or share. The data items comprising context are organized into subjects. For example, subjects defined by HL7 CCOW CM-1.1 include User, Patient and Encounter. In accordance with some aspects of the invention, a subject definition is a data structure including the following parts:

- Name (The Name must be correctly formatted per the CM-1.1 standard because attempting set the context data for an unknown subject is invalid and enforced by the context manager, as specified by the CM-1.1 standard.)
- IsSecure (If true, IsSecure indicates that only applications specifically configured to be participants to that subject can get the subjects context data. Additionally, some applications can be identified as "trusted," meaning that they can change the subject's context data, as specified by the CM-1.1 standard.)
- List of Applications (The List of Applications identifies those configured for the subject and which ones are "trusted".)

- List of Correctly Formatted Item Names for the Subject (This List gives the names of the fields that the subject is allowed to contain. Each name must be correctly formatted per the CM-1.1 standard. Each item name may be one defined in the standard or it may be formatted as a custom item name, where the format is per the CM-1.1 standard.)
- List of Dependent Subjects (One subject may be dependent on another, meaning that if the dependent subject's context is changed, this subject's context data is cleared, as specified in the CM-1.1 standard.)

On the subject of Dependent Subjects, the CM-1.1 standard has the following remarks:

For simplicity, it is generally desirable that there not be any semantic dependencies between context subjects. This enables an application to set a context subject without concern for the other available subjects.

With this assumption, it is possible for an application to independently set the context data items for just one subject, some, or all subjects during the course of a single context change transaction. A context subject whose items have not been set by the application shall remain as it was prior to the transaction.

However, in certain cases it is necessary to define and enforce semantic inter-dependencies between context subjects. The only inter-dependencies that shall be defined and enforced are those that stipulate that a specific set of additional subjects that must be set each time a particular subject is set.

For example, whenever subject X is set by an application, the application must also set subject Y. These dependencies shall be enforced by the context manager. This notion of subject inter-dependency also necessitates an additional assertion, which is that if setting X requires that Y also be set, then whenever Y is set and X is not set, the value for X shall not be post-filled by the context manager. Instead, it shall appear after the context change transaction as though X is empty.

The inter-dependencies for standard subjects are documented in the document *Health Level-Seven Standard Context Management Specification*,

Subject Data Definitions. [Ed. Note: the referenced document is part of the
CM-1.1 standard.]

Inter-dependencies for custom subjects may be stipulated by the organization that defines the custom subject. A custom subject may be
5 dependent upon any other subject. However, a custom subject may not require that a standard subject, or a custom subject defined by another organization, be dependent upon it. In other words, custom subject X can not assert that it must always be set whenever standard subject Y is set.

As used herein, context management is a process of storing, retrieving, modifying
10 and communicating context information between a user and one or more applications, or between the plural applications used in a particular setting. For example, in health care, when a doctor switches from a heart monitor application to a blood analysis application, the patient ID need not be reentered if context management has been implemented. As used herein, context administration is a process of storing, retrieving, modifying and
15 communicating information by which a context management system is controlled or supervised. A single context administrator may supervise multiple context managers or may supervise only one context manager.

According to one aspect of the invention, there is a method of administering a context management system, comprising configuring a subject data definition. The
20 method may further include identifying one or more available context managers to administer. Identifying may also further include pinging possible context manager addresses to find the available context managers.

One type of data useful for security purposes is a shared secret. Thus, according to this aspect of the invention, the method may include maintaining in a subject data
25 definition, a list or other means of identifying applications that are allowed to transact on that subject. The method may further include storing with each application a value, which is a function of, but not equal to a passcode for the application, so that the identity of an application desiring to transact on a secure subject can be verified. The method may yet further include encrypting the passcode to form the value. Methods embodying
30 the invention can further include maintaining an inventory of applications whose context is managed; and maintaining a map relating users to user identifiers formatted for each application in the inventory. When the steps of maintaining are included, the method can

also include identifying for each context, which applications share the context. In yet another variation, the method can configure communication parameters for the available context managers, generate a status report for the system or intervene in a context management process. Interventions can include forcing an application out of a context, canceling a transaction in progress or shutting down a context manager. Methods embodying aspects of the invention can include communicating with a context manager using a hypertext transport protocol. In some embodiments, the hypertext transport protocol is HTTP 1.1.

According to other aspects of the invention, embodiments thereof can include a context management and administrative system, comprising a context manager; and an administration suite. The administration suite can further include a context administrator; and a context server. The context server can further include a passcode service; a user-mapping agent (UMA) service; and a lightweight directory access protocol (LDAP) service. The LDAP service can further provide a data storage module in which the passcode service stores encrypted passcodes and in which the user-mapping agent service stores user mapping data. The context server can further include a registry in which the context manager is registered. Finally, the context server can further include configuration memory holding a common configuration used as a default configuration for the context manager.

Brief Description of the Drawings

In the drawings, in which like reference designations indicate like elements:

Fig. 1 is a schematic block diagram of a system embodying aspects of the invention; and

Fig. 2 is an organizational map of one software embodiment of aspects of the invention.

Detailed Description

The invention will be better understood upon reading the following description of an embodiment of our invention in connection with the drawings. This embodiment is described in connection with the administration of a software system, software

components and software architecture for performing context management to synchronize a plurality of application programs to a single context. A block diagram of the embodiment is given in Fig. 1. The illustrated embodiment complies with the HL7 CCOW CM-1.1 standard. Thus, this embodiment can perform context management in a health care environment including CM-1.1 compliant clinical applications. Other standards for context management protocols and interfaces may exist, particularly outside of health care, for which the present invention is applicable. Regardless of the existence of such standards, while the present invention is described in connection with an application of the principles thereof to the health care industry, the invention may be practiced in connection with any industry that relies on plural applications for which context can preferably be managed or synchronized.

The overall architecture of Fig. 1 is now briefly described.

One or more computer systems, workstations, desktop personal computers (PCs) or the like 100 have executing thereon one or more applications 101, e.g., in the health care field, clinical applications. It is assumed that context management of the applications 101 is desired, and that they comply with at least one standard for context management protocols and interfaces, e.g., HL7 CCOW CM-1.1. A context manager 102, also executing on a computer system, workstation, desktop PC or the like communicates with the applications 101 through an interface and using a protocol defined by standard. The context manager may or may not be executing on the same computer system, workstation, desktop PC or the like as the applications, but may communicate with the applications through a communications network. In the case of an HL7 CCOW CM-1.1 compliant system, Microsoft® COM protocol defines one layer of the communication protocol.

Administration functions may be remote from the managed computer systems, workstations, desktop PCs, etc., for example as an independent software module or program resident on a context administration console 103. The console 103 communicates with the system 100 on which the applications 101 reside through a channel 104 which may pass through an interconnection network, e.g., the Internet, an intranet, a Local Area Network (LAN), a Wide Area Network (WAN) or the like 105. In order to simplify communication through the interconnection network 105, a standard printable-character based protocol, such as the Hypertext Transport Protocol (HTTP)

may be used. Messages transported by HTTP may be formatted as headers, Hypertext Markup Language (HTML) files, Extended Markup Language (XML) files, etc. Other protocols and message formats may alternatively be used. A daemon 106, resident on each of the systems 100, translates the protocol used for communication over the interconnection network (e.g., HTTP) into that used for context management of the applications (e.g., COM). The daemon 106 may alternatively be part of the context manager 102.

A database 107 of context information is maintained either on the context administration console or separately. When a context management installation tool 108 is invoked, similar links are established using an administration daemon 109 to draw current, common context information from the database 107, to set up the context of newly installed applications 100. This administration function can be performed at other times, as well, such as when a stand-alone system is brought into the context managed environment.

Although both the foregoing and the following discussion is given with respect to HL7 COW CM-1.1, HTTP 1.1, COM and health care clinical settings in particular, it will be apparent from the discussion that the inventors contemplate adaptations of the concepts illustrated to other industries and settings, some suggestions for which have been given.

For convenience, and without loss of generality, modules, programs and machines, particularly machines executing software programs are referred to herein as modules. In this document, modules could be function or procedure calls in a software program, a program module, a complete program, a machine executing a program or any part of a program, and the like, where a module performs a defined portion of the overall function of the system described.

It should be noted that the architecture described above appears to assume a particular partitioning of the context management and context administration task into individual modules, as evidenced by the blocks of Fig. 1. That apparent assumption, of course, is that there is a context manager module, a context administrator module and a context server module. However, the inventors have found that the context manager and context server can be combined in a single module in which the functions are shared in such a way as to behave as a single functional block. Alternatively, the context

administrator and context server can be combined in a single module in which the functions are shared in such a way as to behave as a single functional block. Finally, all three separately described functional elements can be combined in a single module in which the functions are shared in such a way as to behave as a single functional block.

- 5 These variations have important implications for the design of the communications and user interface portions of the system because communication between more tightly coupled functional elements, such as within a module, is easier and more secure than between more loosely coupled elements, such as between modules, and because the user interface can ultimately be defined using standard elements of a page markup language
10 interpreted by a browser, rather than a proprietary ad hoc interface design.

A context management and administration system according to a presently preferred embodiment of the invention has been implemented using the Microsoft Java programming language. The structure of the code is illustrated in Fig. 2.

- A top layer, over all, is the user interface 200. This may be implemented using a
15 conventional presentation manager available as a resource in many operating systems, or using a markup language such as HTML or the like and HTTP so that it can use a standard browser as the display module. Beneath the user interface layer, and tunneling through both lower layers is the HTTP, COM, signing and XML communication facility 201 used by all layers. An inventory facility 202, passcode facility 203 and user
20 mapping agent facility 204, all described below, exist in the second layer. Finally, the third layer embodies the low-level functions of database management 205, scanning the network (pinging) 206 and Lightweight Directory Access Protocol (LDAP) 207, also all described below.

- The following description explains the operation of the components of the
25 architecture described above.

- The context administrator, which is connected to a communication network through which it can communicate with other elements of the system, compiles an inventory of context managers available to it on the network. The context administrator determines whether a context manager is available at each legal network address by
30 ping at each address a communication port registered with the Internet Assigned Numbers Authority (IANA). When a context manager is configured to respond to messages on the registered port, at the address pinged, it responds. The context

administrator can then build a database of available context managers. The database can be presented to users in a tree form, similar to the tree used in the Windows™ Explorer program used to navigate through files and folders on a computer hard disk.

5 The inventory can alternatively be built and updated automatically as context managers join or leave a network. In order to do so, each context manager will register itself to the context administrator by transmitting an identifier, for example a DCE UUID, “hello” message to the context administrator. The identifier needs to be unique within a given network.

10 As part of inventory management, a context manager can be removed from inventory, making it invisible to the context administrator. A context manager manually removed by a user of the context administrator then continues to function normally, but cannot be configured, etc. by the context administrator.

Once an inventory of context managers exists, the context administrator can then configure the context managers, obtain status from the context managers, perform 15 interventions on the context managers and produce human- or machine-readable outputs communicating various types of information about the context administration process. It is also possible to view a human-readable listing of all operations performed by the context administrator. The listing is updated or appended to each time an operation is performed.

20 Configuring the context managers is a wide-ranging task, defining how a particular instance of a context manager behaves, as well as defining site-wide information relevant to the operation of all context managers under administration. Examples of configuration parameters defining how a particular instance of a context manager behaves include the parameters related to the details of performing a 25 transaction, such as timing parameters. Examples of configuration parameters which affect an entire site include defining which applications will join in a particular context, passcodes and other security settings, and the subjects defined by the standard, including User, Patient and Encounter, required by the standard, and optional customizable subjects.

30 Configuring the security settings includes defining values in a database identifying which subjects are available only through a secure connection. For example, User is a secure subject. Defining a subject as secure necessitates that trusted

participants be identified, as they can only access the subject, for example for viewing or editing, provided they give the passcode identifying them as a trusted participant. In the preferred embodiment, a trusted participant is one which will be allowed to edit the contents of a secure subject. In the HL7 CCOW CM-1.1 standard, User is a secure subject.

The contents of a subject are now illustrated by describing the subject, User. The subject User is used to configure who the users are within a particular site, for example. A user mapping agent identifies each user by a unique, site-wide User Identification (User ID). The User ID is linked to the individual login identifiers, such as username and password, used to obtain access to each individual application. This map of User ID to login identifier is housed on the context server module described above.

Status information which can be obtained by the context administrator can include one or more of the version number of each context manager in the inventory, which context managers have joined a particular context, what changes have been processed by each context manager, what changes have been aborted by each context manager, etc. Status information can also include a complete record of the current configuration of each context manager, so that if a context manager inadvertently becomes out of sync with the changes made by the context administrator, as determined by making a status inquiry, that context manager can be brought back into sync. Finally, status can also include a log of exceptions which may occur from time to time during operation. The log may contain the date and time of each event, the severity of the event and a message describing the event.

In some circumstances, intervention in the operation of individual context managers may be required. The context administrator module can be configured to force an application to leave a context, cancel a transaction in progress, remotely shut down an aberrantly behaving context manager or remotely restart a context manager.

According to a preferred embodiment, all outputs of the context administrator can be printed, sorted, exported to XML, etc., so as to be available in both human- and machine-readable form.

Context changes are effected in the system by means of transactions. In the health care field, HL7 CCOW CM-1.1 defines what constitutes a transaction. According to this standard, a secure transaction occurs as follows:

This method is similar to `ContextData::SetItemValues`. [See CM-1.1.1.]
The primary difference is that the context participant's digital signature shall be provided as the value of the input *appSignature* when secure subject item values are among the items to be set. This signature enables the context manager to authenticate that they came from a designated application or from a valid secure subject mapping agent, and that the values were not tampered with between the time they were sent and were received.

A signature is not required when the values for the user subject items are null. This enables any application to set the user context to empty. When a signature is not provided, the value of the input *appSignature* shall be an empty string ("").

Concatenating the string representations of the following inputs in the order listed shall form the data from which a message digest is computed by the participant:

- participantCoupon*
- itemNames* (i.e., All the elements in the order that they appear in the array.)
- itemValues* (i.e., All the elements in the order that they appear in the array.)
- contextCoupon*

A participant shall compute its digital signature by encrypting the message digest with its private key.

The exception `SignatureRequired` is raised if the value of *appSignature* is not a digital signature and a signature is required in order to perform this method.

The exception `AuthenticationFailed` is raised if a digital signature is required and provided, but the process of authentication determines that: the application that invoked this method did not previously provide its public key via the interface `SecureBinding`; that the input *appSignature* has been forged; that the input parameter values have been tampered with; that the participant has not been designated for performing user context changes.

We now return to Fig. 1, to discuss how the illustrated architecture provides the facility for performing the operations described.

The context administrator module contains the logic defining the overall operation of the system. The actual maintenance and switching of context is performed by the context manager module. A variety of support functions are provided by the context server. For example, the context server may include a passcode service, a user mapping agent service and a LDAP service. These services are now discussed.

The passcode service provides a virtual software vault for the passcodes. Passcodes are stored in encrypted form in the LDAP data store accessed by the context server. Passcodes are not themselves ever transmitted as messages, but rather the context manager sends a signed HTTP message to the context server, which checks the signature and contents of the message against the stored, encrypted passcode. An MAC acknowledgement is returned to the context manager either authorizing or denying the request contained in the message.

The user mapping agent provides a similar service with respect to User IDs. A request is sent by the context manager for the login identifiers corresponding to a particular User ID, and a list of data is returned to the context manager. The context manager can then add the login identifiers corresponding to the User ID to the context data, in this case for the User subject, where it can be accessed by any application that has joined in the current context and that also has access to the User subject, which is secure.

Similarly, if the context administrator sends to the context server an LDAP message requesting a change to the passcode list or the map of User ID information, a security check is first performed, and then the transaction is either approved or disapproved.

The context server could be used to provide other services, as well. For example, the context server could provide a registry service, in which each context manager is registered. The registry would automate the inventorying process to a greater extent, allowing context managers and context servers to perform a handshake when a new module comes on line on a network, and the context manager to be automatically registered. The context administrator could also provide a default configuration service.

Each registered context manager could be configured to the default configuration at the time it is registered, unless the default configuration is overridden.

5 The context server can be implemented as a server appliance. A server appliance is a network-connected server that services multiple client computers. Like conventional servers, a server appliance receives requests from client computers to perform specific tasks. The server performs a task requested and returns back to the client the result of performing the task. Unlike conventional servers that provide general purpose platforms for a wide range of computing tasks, a server appliance is singular in purpose. A server appliance contains specialized software and possibly specialized hardware to enable it to achieve its purpose. Thus, a server appliance can be optimized for the specific tasks that it is intended to perform, thereby reducing the cost and complexity of the server appliance when compared with the cost and complexity of a general purpose server configured for the same purpose.

15 The context administrator inventories the network by pinging all possible context manager addresses on a port registered with the IANA, according to one embodiment of the invention. The context administrator can be implemented on a Windows™ 98/2000/NT machine, and use the Windows™ Networking ping function to perform the required scan. Other operating systems such as Unix, Linux and the like, with their corresponding networking facilities can also be used.

20 According to some embodiments of the invention, communication between the context administrator and the context manager can occur using HTTP. However, context managers communicate with applications using the COM protocol, as mentioned above. Therefore, in these embodiments of the invention, rather than add to the complexity and size of the context manager, a software daemon translates between HTTP and COM protocols. The context administrator sends signed messages to the context manager in HTTP, which are translated by the daemon into signed COM messages. The context manager returns XML messages, which the daemon wraps in HTTP to forward to the context administrator. Naturally, other communications protocols can be used, and even the native protocol used by the context manager can be used directly, in variations on
30 embodiments of the invention.

It should be noted that for security reasons, the daemon is restricted to calling only COM objects which are part of the context manager module. Theoretically, an

HTTP request could be for any COM object, but that would create a security breach by allowing the daemon to be used to gain access to other system components.

In order to effect proper communication between the context managers and the context servers, one configuration parameter set in the context managers is which context server, of a possible plurality on a given network, should be used. A failover mechanism can also be provided which would cause a secondary context server to be used in the event a primary context server failed to respond to a message.

Based upon the foregoing architecture, a new subject is implemented by the context administrator as follows. First the subject is defined in the context administrator by giving it a name and defining its schema. The definition is stored in the repository. Next, a user gestures to send out the configuration, causing an HTTP call to the context manager, through the daemon, to be sent out. Alternatively, the configuration can be stored in a context server in a configuration service, as discussed above. Finally, the context manger obtains and stores the new configuration information locally in a text file. This discussion, of course, assumes that one or more applications controlled by the context manager have a priori knowledge of the new subject, thus giving life and meaning to the new subject definition. If the subject has been defined to be secure, then the application will need a passcode to use the subject. Also, any new subject definition must have at least one application capable of setting data in the subject.

In one variation of the invention, the context manager can be embodied in a server appliance, as described above in connection with the context server. In such an embodiment of the invention, the applications may reside in a different computer, workstation, PC, etc. than the context manager appliance, which also may reside in a different computer, workstation, PC, etc. than the context administrator. The components of such a system which reside in different computers, workstations, PCs, etc. would be connected to each other through a network, such as a LAN, a WAN, an intranet, the Internet, etc.

In other variations of the invention, the structures and methods described herein can be combined with: the context sensitive web casting methods and apparatus disclosed in U.S. patent application Serial No. 60/135,907, filed May 25, 1999, incorporated herein in its entirety by reference; the context management server appliance methods and apparatus disclosed in U.S. patent application Serial No. 60/136,670, filed

May 28, 1999, incorporated herein in its entirety by reference; the healthcare server appliances methods and apparatus disclosed in U.S. patent application Serial No. 60/139,235, filed June 14, 1999, incorporated herein in its entirety by reference; the HTTP Post message encoding of COM dispatch interface calls disclosed in U.S. patent application Serial No. 60/139,145, filed June 14, 1999, incorporated herein in its entirety by reference; the application context management methods and apparatus disclosed in U.S. patent application Serial No. 60/139,145, filed June 14, 1999, incorporated herein in its entirety by reference; and the context management web site methods and apparatus disclosed in U.S. patent application Serial No. 60/145,681, filed July 26, 1999, incorporated herein in its entirety by reference. This discussion and that contained in the referenced patent applications clearly suggest to the skilled artisan how such combinations would be made.

The invention has now been described and illustrated in connection with one embodiment and some variations thereof. Numerous other variations and modifications which will now be obvious to the skilled artisan are also contemplated as within the scope and spirit of the invention. The scope of the invention is not to be limited by the description of embodiments thereof, but only by the scope of the properly construed claims which follow.

What is claimed is:

CLAIMS

1. A method of administering a context management system, comprising:
configuring a subject data definition.
- 5 2. The method of claim 1, further comprising:
identifying one or more available context managers to administer.
3. The method of claim 2, wherein identifying further comprises:
pinging possible context manager addresses to find the available context
10 managers.
4. The method of claim 1, further comprising:
maintaining in a subject data definition, which applications are allowed to access
the subject.
- 15 5. The method of claim 4, further comprising:
storing with each application a value which is a function of but not equal to a
passcode for the application.
- 20 6. The method of claim 5, further comprising:
encrypting the passcode to form the value.
7. The method of claim 1, further comprising:
maintaining an inventory of applications whose context is managed.
- 25 8. The method of claim 7, further comprising:
maintaining a map relating User IDs to login identifiers formatted for each
application in the inventory.
- 30 9. The method of claim 2, further comprising:
configuring communication parameters for the available context managers.

10. The method of claim 2, further comprising:
generating a status report for the system.
11. The method of claim 2, further comprising:
5 intervening in a context management process.
12. The method of claim 11, wherein intervening further comprises:
forcing an application out of a context.
- 10 13. The method of claim 11, wherein intervening further comprises:
canceling a transaction in progress.
14. The method of claim 11, wherein intervening further comprises:
shutting down a context manager.
- 15 15. The method of claim 1, further comprising:
communicating with a context manager using a hypertext transport protocol.
16. The method of claim 15, wherein the hypertext transport protocol is HTTP 1.1.
- 20 17. A context management and administrative system, comprising:
a context manager; and
an administration suite.
- 25 18. The system of claim 17, wherein the administration suite further comprises:
a context administrator; and
a context server.
19. The system of claim 18, wherein the context server further comprises:
30 a passcode service;
a user mapping agent (UMA) service; and
a lightweight directory access protocol (LDAP) service.

ABSTRACT

A context management and administration system includes a context manager, which manages the context of plural applications programs, and an administration suite, which oversees and manages the manager. Context administration can include setting up
5 and maintaining subject data definitions, intervening in context manager operations, providing security functions to protect sensitive context information against tampering by unauthorized users, etc.

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278

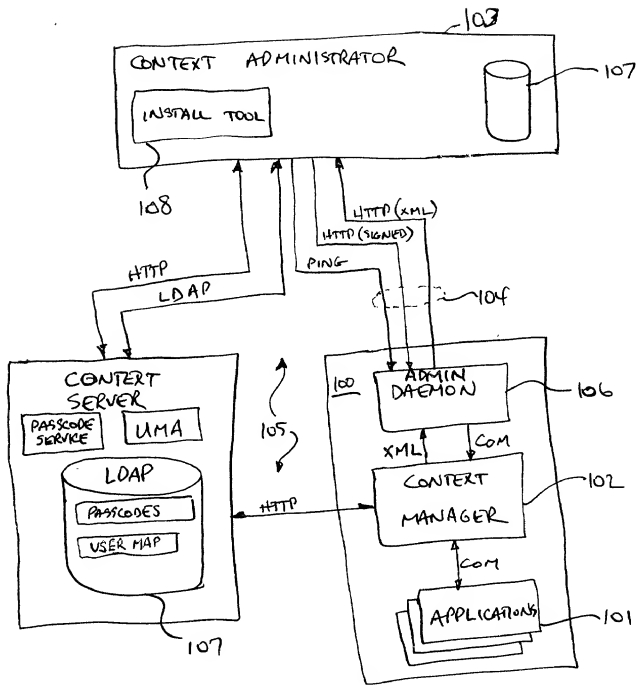


FIG. 1

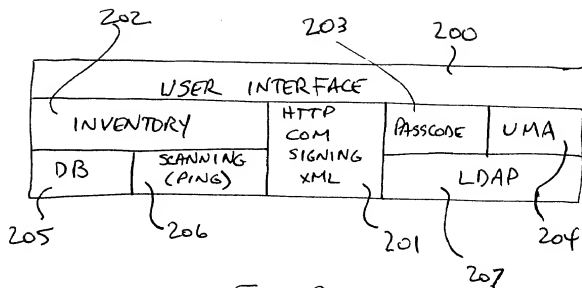


FIG. 2